


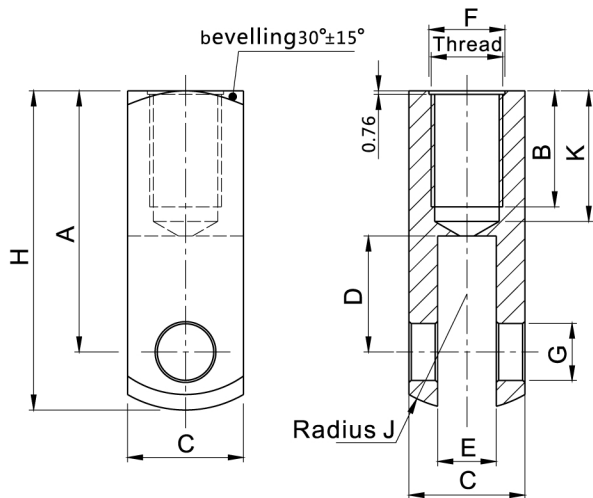

Clevises

Part No.	Dimensions (inch)											
	Thread Class2B	A ±0.15	B + .125	C ±0.10	D ±0.15	E +0.10 -0.00	F ±0.10	G +0.03 -0.01	H ±0.15	I +0.03 -0.01	J ±0.30	K
GU 5 40	5-40	0.437	Thru	0.250	0.250	0.130	0.140	0.128	0.562	0.101	0.250	Thru
GU 10 32	10-32	0.750	0.375	0.375	0.375	0.190	0.218	0.187	0.937	0.1 61	0.375	Thru
GU 1/4 28	1/4-28	0.937	0.500	0.500	0.437	0.255	0.281	0.250	1.187	0.213	0. 500	Thru
GU 5/16 24	5/16-24	0.937	0.500	0.500	0.437	0.255	0.343	0.250	1.187	0.272	0.500	0.625
GU 3/8 24	3/8-24	1.312	0.750	0.750	0.562	0.380	0.406	0.375	1.687	0.332	0.750	Thru
GU 7/16 20	7/16-20	1.312	0.750	0.750	0.562	0.380	0.468	0.375	1.687	0.391	0.750	0.875
GU 1/2 20	1/2-20	1.312	0.750	0.750	0.562	0.380	0.531	0.375	1.687	0.453	0.750	0.875
GU 5/8 18	5/8-18	2.250	1.000	1.000	1.000	0.505	0.656	0.500	2.750	0.578	1.000	1.125

Code of thread: left -handed thread - L, E.g . GU- 5-40L.

Material and surface treatments:

1) Low carbon steel. Coated with rust-proof oil or zinc plating.

2) Alternative stainless steel 304 or stainless steel 316.

Specials on request (only volumes).