



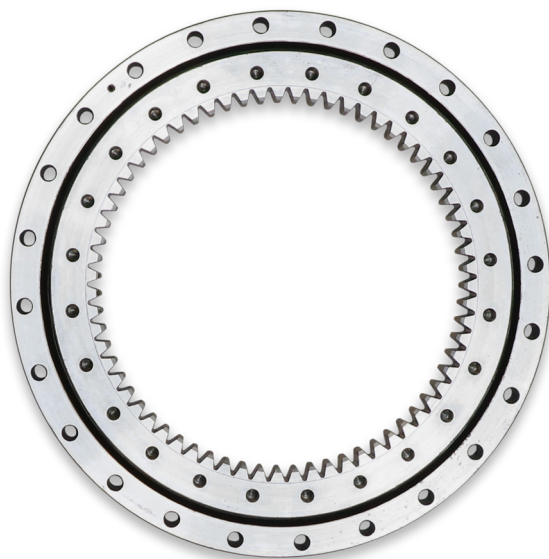



IB-25-M

 **BÖNNEKAMP**

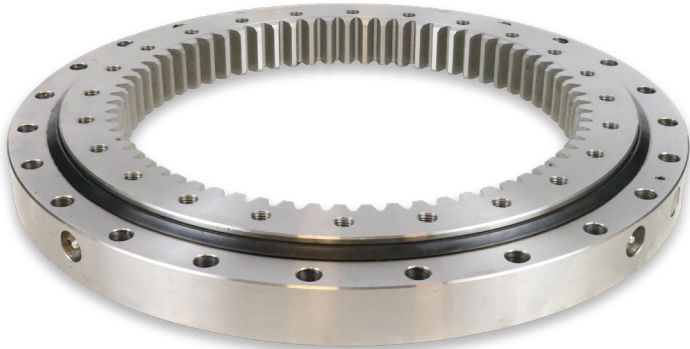

- Internal gearing – Ring solid
- Balls Ø 25 mm
- Diameters 855 – 1155 mm

TECHNICAL DATA

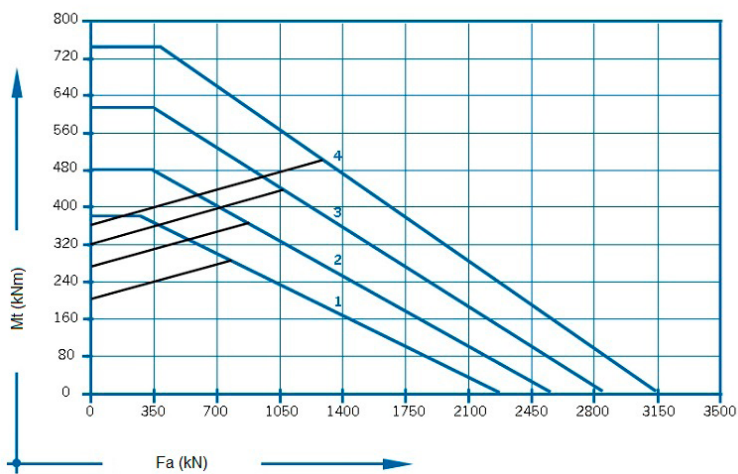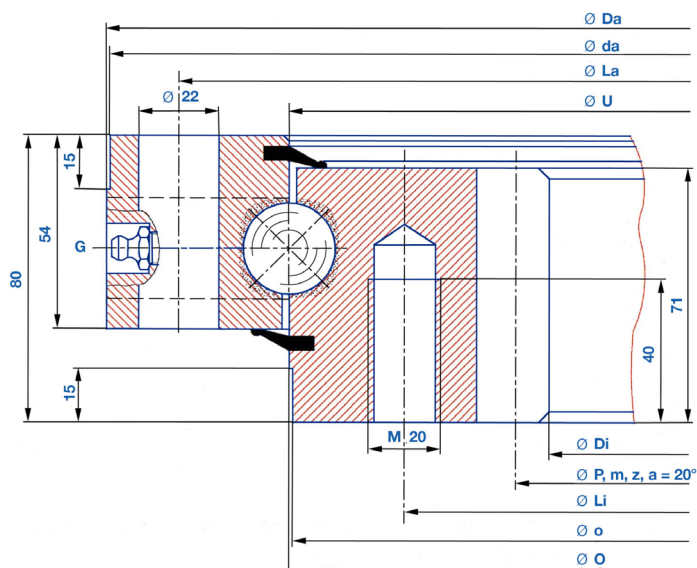

No.	Type	Dimensions						Mounting holes				Gearing			Tooth force		Mass (kg)
		Da (mm)	da +IT8 (mm)	U (mm)	O (mm)	c +IT8 (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	P (mm)	m	z	Fz nom (kN)	Fz max (kN)	
1	IB-1-25-855-1-M	855	853	756	756	755	610	815	24	694	24	630	10	63	42,10	84,20	119
2	IB-1-25-955-1-M	955	953	856	856	855	710	915	28	794	28	730	10	73	42,10	84,20	137
3	IB-1-25-1055-1-M	1055	1053	956	956	955	810	1015	30	894	30	830	10	83	42,10	84,20	149
4	IB-1-25-1155-1-M	1155	1153	1056	1056	1055	910	1115	30	994	30	930	10	93	42,10	84,20	165

G = 4 Grease nipples DIN 71412 AM 10x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.