



IB-32-F


 **BÖNNEKAMP**

Slewing Ring

IB-32-F



RING FLANGE SHAPE

INTERNAL GEARING

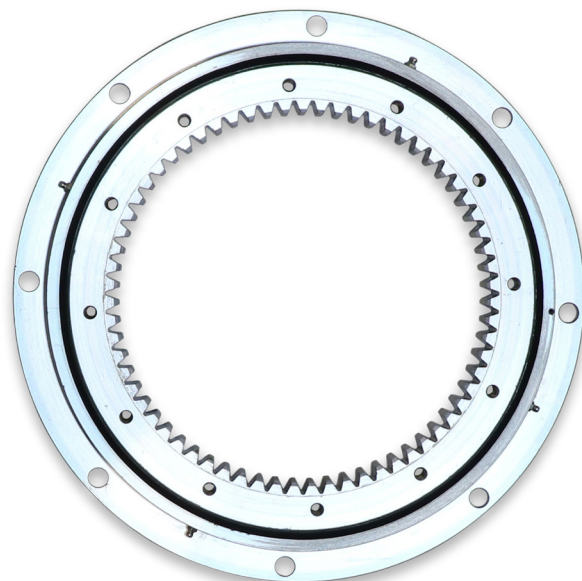

- Internal gearing – Ring flange shape
- Balls Ø 32 mm
- Diameters 1100 – 1600 mm

TECHNICAL DATA

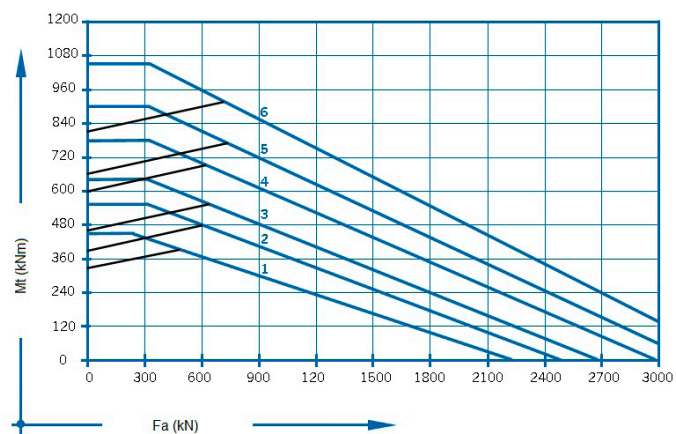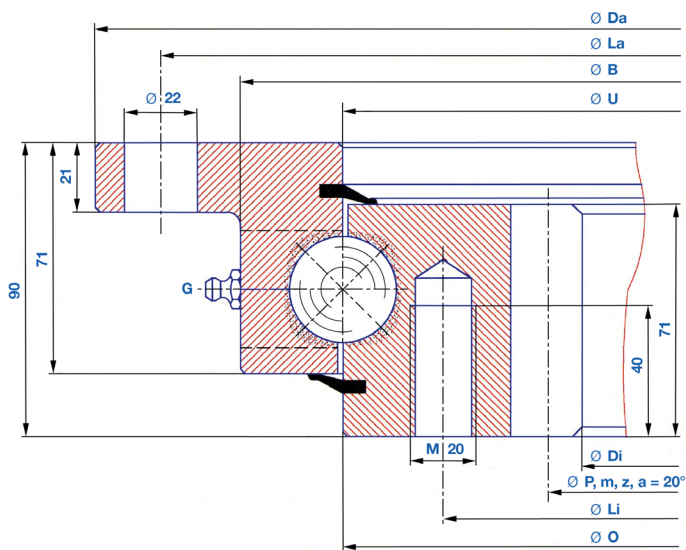

No.	Type	Dimensions					Mounting holes				Gearing			Tooth force		Massa (kg)
		Da (mm)	U (mm)	O (mm)	D (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	P (mm)	m	z	Fz nom (kN)	Fz max (kN)	
1	IB-1-32-1100-1-F	1100	1017	955	955	812	1060	30	894	30	830	10	83	42,10	84,20	159
2	IB-1-32-1200-1-F	1200	1117	1055	1055	912	1160	30	994	30	930	10	93	42,10	84,20	176
3	IB-1-32-1300-1-F	1300	1217	1155	1155	1012	1260	36	1094	36	1030	10	103	42,10	84,20	192
4	IB-1-32-1400-1-F	1400	1317	1255	1255	1112	1360	42	1194	42	1130	10	113	42,10	84,20	208
5	IB-1-32-1500-1-F	1500	1417	1355	1355	1212	1460	42	1294	42	1230	10	123	42,10	84,20	226
6	IB-1-32-1600-1-F	1600	1517	1455	1455	1310	1560	48	1394	48	1330	10	133	42,10	84,20	243

G = 6 Grease nipples DIN 71412 AM 10x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.