



OB-20-F


 **BÖNNEKAMP**

Slewing Ring

OB-20-F



RING FLANGE SHAPE

EXTERNAL GEARING

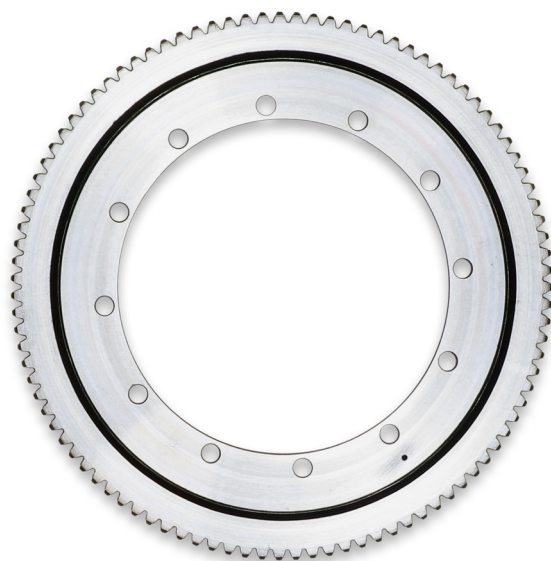

- External gearing – Ring flange shape
- Balls Ø 20 mm
- Diameters 504 – 1198 mm

TECHNICAL DATA

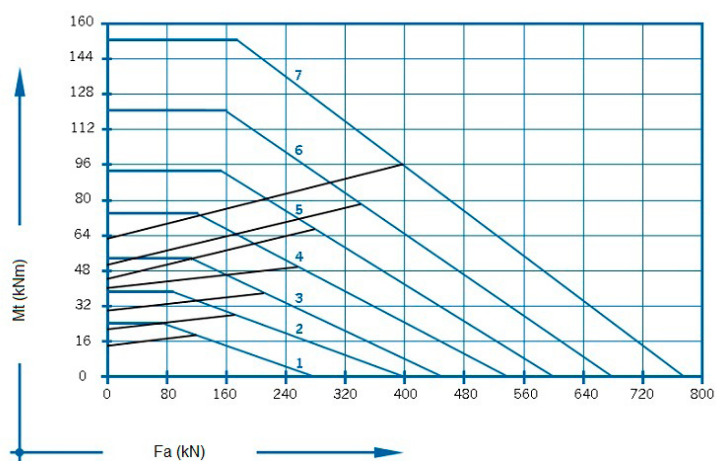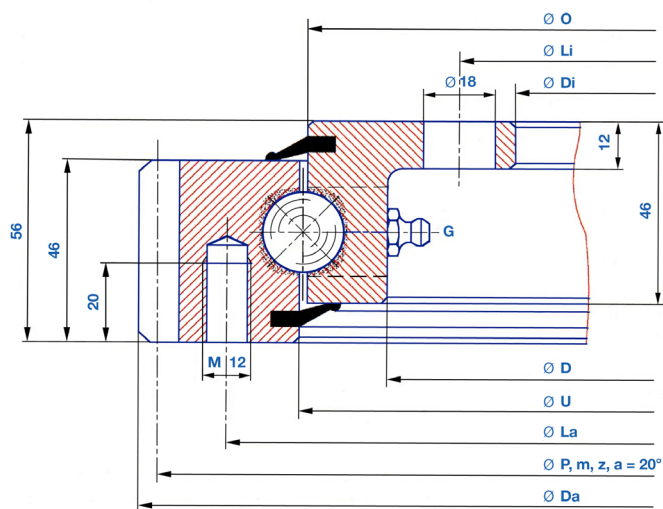

No.	Type	Dimensions					Mounting holes				Gearing			Tooth force		Mass (kg)
		Da (mm)	U (mm)	O (mm)	D (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	P (mm)	m	z	Fz nom (kN)	Fz max (kN)	
1	OB-1-20-505-1-F	504	415,5	412,5	375	304	455	10	332	12	495	5	99	10,80	21,60	29
2	OB-1-20-650-1-F	640,8	545,5	542,5	505	434	585	14	462	14	630	6	105	13,10	26,20	40
3	OB-1-20-750-1-F	742,8	645,5	642,5	605	534	685	16	562	16	732	6	122	13,10	26,20	47
4	OB-1-20-850-1-F	838,8	745,5	742,5	705	634	785	18	662	16	828	6	138	13,10	26,20	53
5	OB-1-20-950-1-F	950,4	845,5	842,5	805	734	885	20	762	18	936	8	117	17,60	35,20	64
6	OB-1-20-1050-1-F	1046,4	945,5	942,5	905	834	985	20	862	20	1032	8	129	17,60	35,20	69
7	OB-1-20-1200-1-F	1198,4	1095,5	1092,5	1055	984	1135	22	1012	20	1184	8	148	17,60	35,20	82

G = 4 Grease nipples DIN 71412 AM 8x1 equally spaced

Line No. = maximum static load racewav. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.