





OB-20-M

 **BÖNNEKAMP**



- External gearing – Ring solid
- Balls $\varnothing 20$ mm
- Diameters 503 – 1198 mm

TECHNICAL DATA

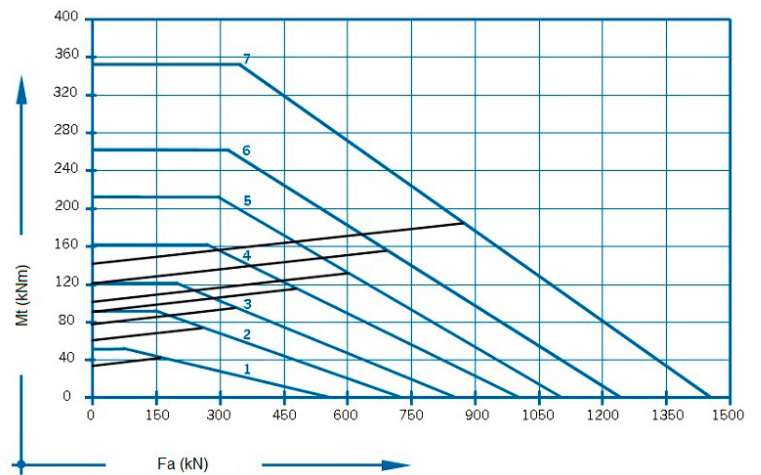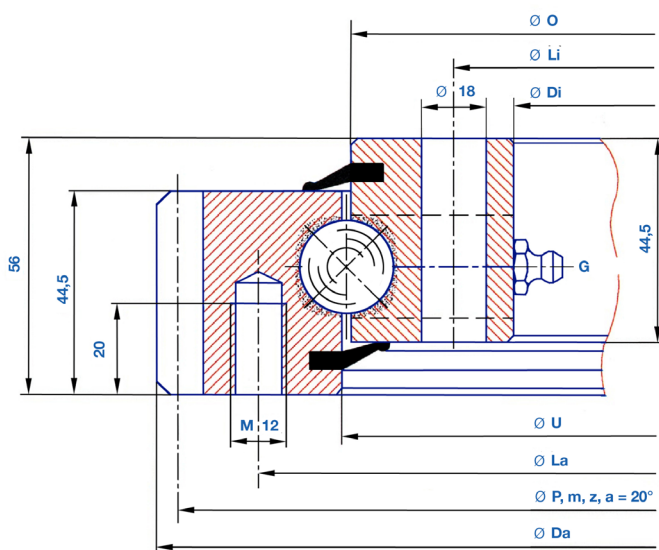

No.	Type	Dimensions				Mounting holes				Gearing			Tooth force		Mass
		Da (mm)	U (mm)	O (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	P (mm)	m	z	Fz nom (kN)	Fz max (kN)	
1	OB-1-20-505-1-M	503,3	415,5	412,5	342	455	20	368	24	495	5	99	10,80	21,60	31
2	OB-1-20-650-1-M	640,3	545,5	542,5	472	585	28	498	32	630	6	105	13,10	26,20	43
3	OB-1-20-750-1-M	742,3	645,5	642,5	572	685	32	598	36	732	6	122	13,10	26,20	52
4	OB-1-20-850-1-M	838,1	745,5	742,5	672	785	36	698	40	828	6	138	13,10	26,20	59
5	OB-1-20-950-1-M	950,1	845,5	842,5	772	885	36	798	40	936	8	117	17,60	35,20	71
6	OB-1-20-1050-1-M	1046,1	945,5	942,5	872	985	40	898	44	1032	8	129	17,60	35,20	77
7	OB-1-20-1200-1-M	1198,1	1095,5	1092,5	1022	1135	44	1048	48	1184	8	148	17,60	35,20	91

G = 4 Grease nipples DIN 71412 AM 8x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.