






OB-32-F

 **BÖNNEKAMP**

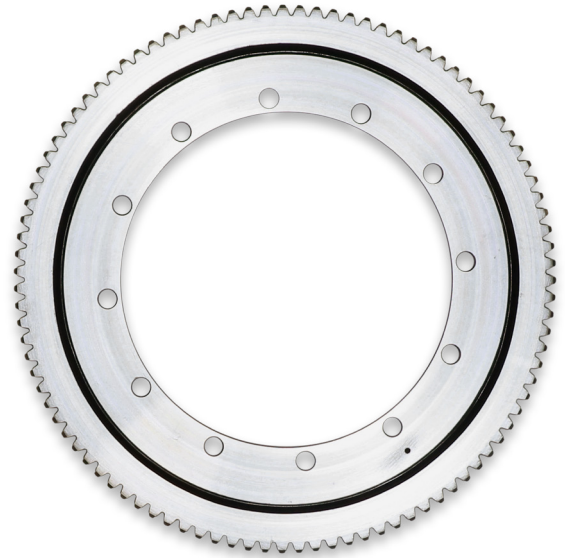

- External gearing – Ring flange shape
- Balls $\varnothing 32$ mm
- Diameters 1100 – 1600 mm

TECHNICAL DATA

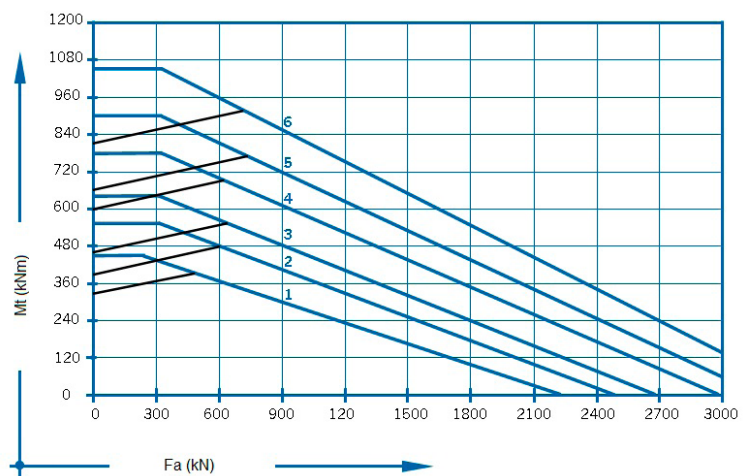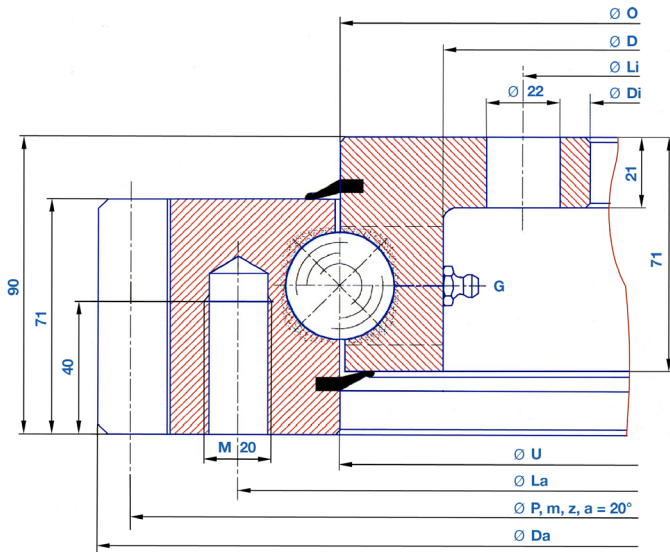

No.	Type	Dimensions						Mounting holes			Gearing			Tooth force		Mass (kg)
		Da (mm)	U (mm)	O (mm)	D (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	P (mm)	m	z	Fz nom (kN)	Fz max (kN)	
1	OB-1-32-1100-1-F	1098	955	955	893	805	1016	30	845	30	1080	9	120	34,10	68,20	165
2	OB-1-32-1200-1-F	1200	1055	1055	993	905	1116	30	945	30	1180	10	118	37,85	75,70	183
3	OB-1-32-1300-1-F	1300	1155	1155	1093	1005	1216	36	1045	36	1280	10	128	37,85	75,70	200
4	OB-1-32-1400-1-F	1400	1255	1255	1193	1105	1316	42	1145	42	1380	10	138	37,85	75,70	216
5	OB-1-32-1500-1-F	1500	1355	1355	1293	1205	1416	42	1245	42	1480	10	148	37,85	75,70	234
6	OB-1-32-1600-1-F	1600	1455	1455	1393	1305	1516	48	1345	48	1580	10	158	37,85	75,70	250

G = 6 Grease nipples DIN 71412 AM 10x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.