



WB-20-F

 **BÖNNEKAMP**

Slewing Ring

WB-20-F



RING FLANGE SHAPE

WHITOUT GEARING



- Without gearing – Ring flange shape
- Balls Ø 20 mm
- Diameters 518 – 1198 mm

TECHNICAL DATA

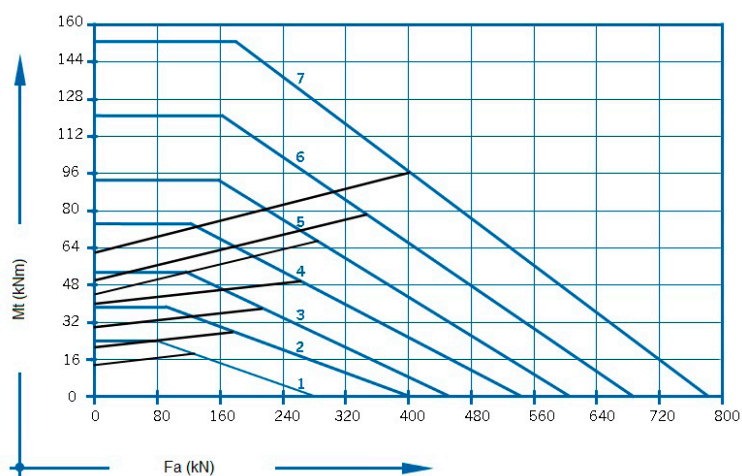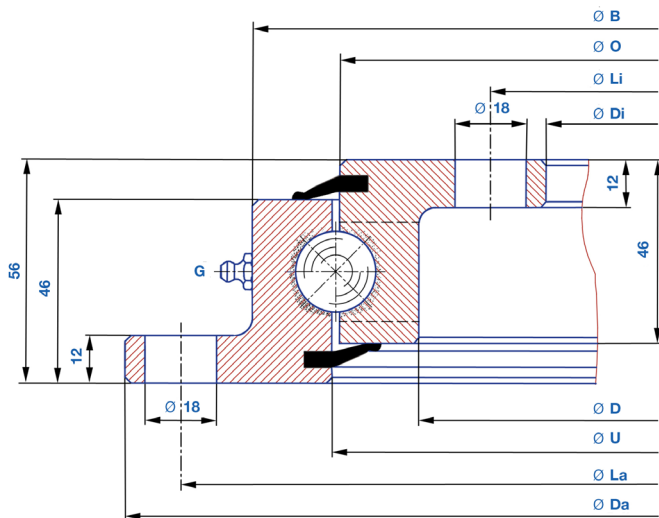

No.	Type	Dimensions						Mounting holes				Mass (kg)
		Da (mm)	B (mm)	U (mm)	O (mm)	D (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	
1	WB-1-20-505-1-F	518	453	415,5	412,5	375	304	490	8	332	12	23,5
2	WB-1-20-650-1-F	648	583	545,5	542,5	505	434	620	10	462	14	31
3	WB-1-20-750-1-F	748	683	645,5	642,5	605	534	720	12	562	16	36,5
4	WB-1-20-850-1-F	848	783	745,5	742,5	705	634	820	12	662	16	43
5	WB-1-20-950-1-F	948	883	845,5	842,5	805	734	920	14	762	18	48
6	WB-1-20-1050-1-F	1048	983	945,5	942,5	905	834	1020	16	862	20	53
7	WB-1-20-1200-1-F	1198	1133	1095,5	1092,5	1055	984	1170	16	1012	20	62

G = 4 Grease nipples DIN 71412 AM 8x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)



BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.