



WB-20-M


 **BÖNNEKAMP**

Slewing Ring

WB-20-M



RING SOLID

WITHOUT GEARING

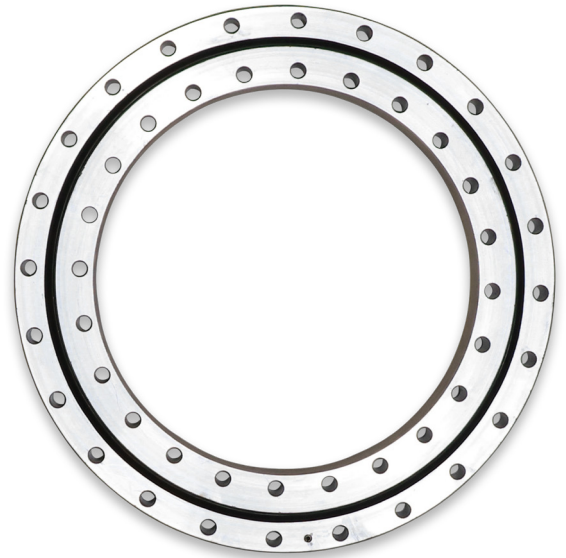

- Without gearing – Ring solid
- Balls Ø 20 mm
- Diameters 486 – 1166 mm

TECHNICAL DATA

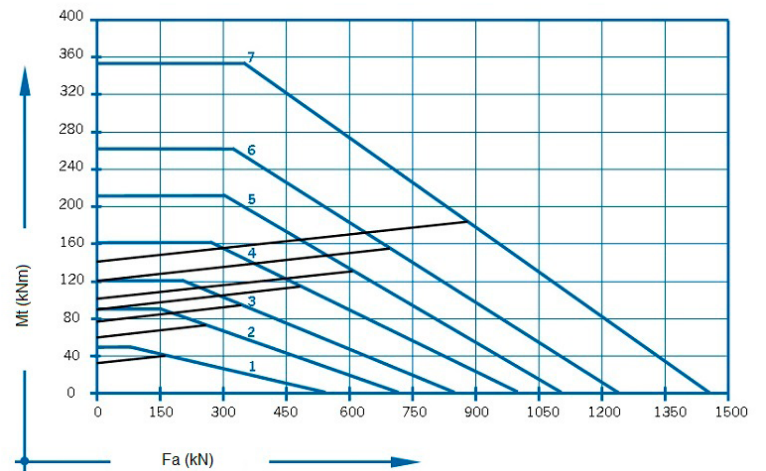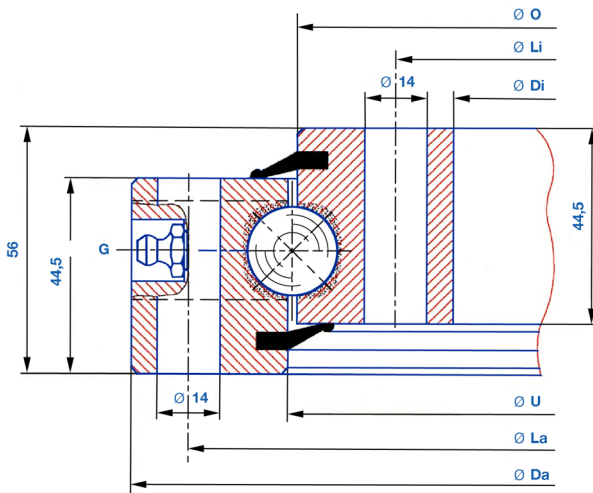

No.	Type	Dimensions				Mounting holes				Mass
		Da (mm)	U (mm)	O (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	(kg)
1	WB-1-20-486-1-M	486	415,5	412,5	342	460	24	375	24	29
2	WB-1-20-616-1-M	616	545,5	542,5	472	590	32	505	32	37
3	WB-1-20-716-1-M	716	645,5	642,5	572	690	36	605	36	44
4	WB-1-20-816-1-M	816	745,5	742,5	672	790	40	705	40	52
5	WB-1-20-916-1-M	916	845,5	842,5	772	890	40	805	40	60
6	WB-1-20-1016-1-M	1016	945,5	942,5	872	990	44	905	44	67
7	WB-1-20-1166-1-M	1166	1095,5	1092,5	1022	1140	48	1055	48	77

G = 4 Grease nipples DIN 71412 AM 8x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.