



WB-25-M


 **BÖNNEKAMP**

Slewing Ring

WB-25-M



RING SOLID

WITHOUT GEARING

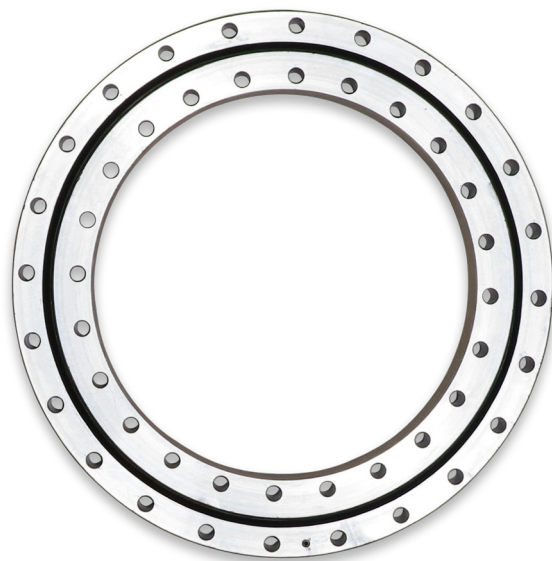

- Without gearing – Ring solid
- Balls Ø 25 mm
- Diameters 855 – 1155 mm

TECHNICAL DATA

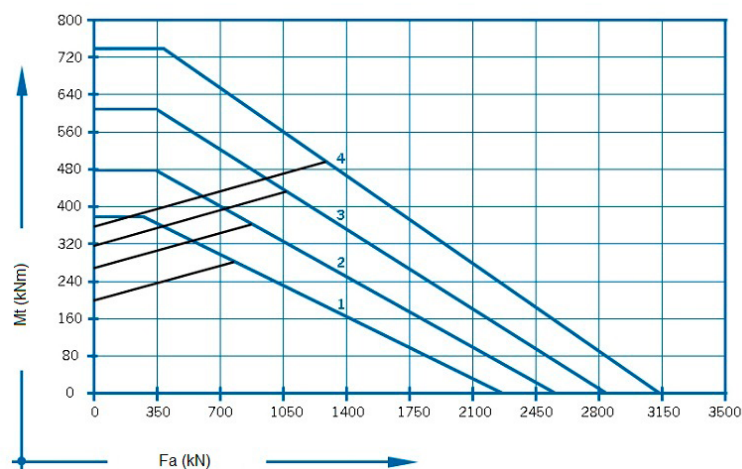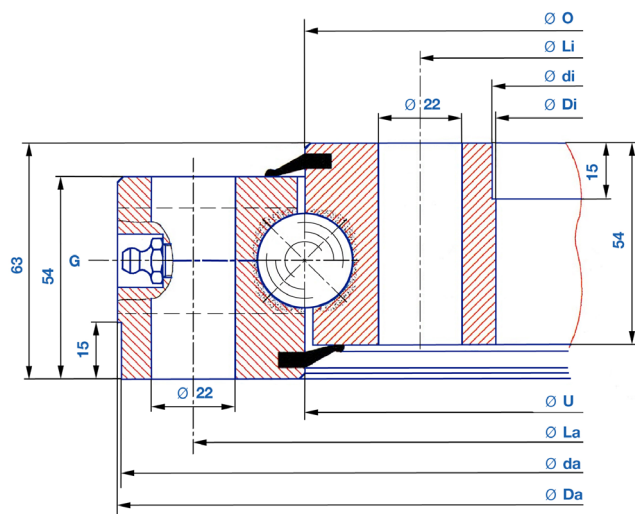

No.	Type	Dimensions						Mounting holes				Mass
		Da (mm)	da +IT8 (mm)	U (mm)	O (mm)	di +IT8 (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	(kg)
1	WB-1-25-855-1-M	855	853	756	756	657	655	815	24	695	24	90
2	WB-1-25-955-1-M	955	953	856	856	757	755	915	28	795	28	101
3	WB-1-25-1055-1-M	1055	1053	956	956	857	855	1015	30	895	30	115
4	WB-1-25-1155-1-M	1155	1153	1056	1056	957	955	1115	30	995	30	128

G = 4 Grease nipples DIN 71412 AM 10x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.