



WB-32-F

 **BÖNNEKAMP**

Slewing Ring

WB-32-F



RING FLANGE SHAPE

WITHOUT GEARING



- Without gearing – Ring flange shape
- Balls Ø 32 mm
- Diameters 1100 – 1600 mm

TECHNICAL DATA

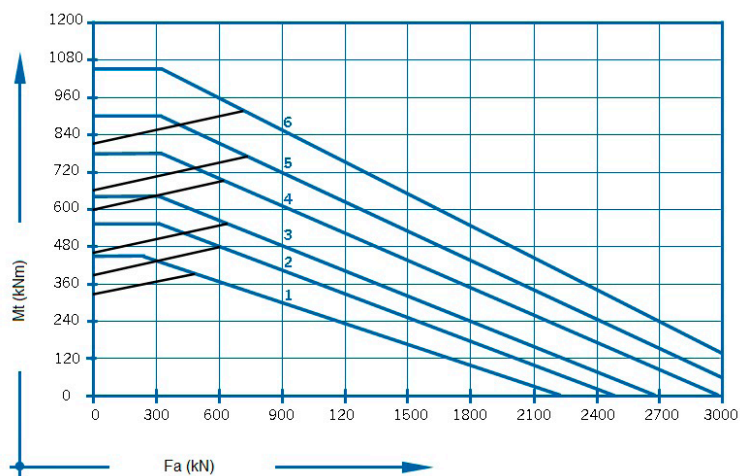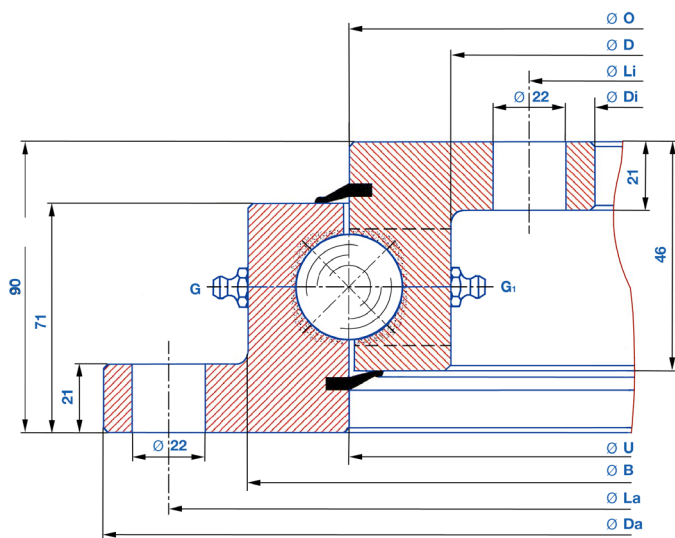

No.	Type	Dimensions						Mounting holes				Mass (kg)
		Da (mm)	B (mm)	U (mm)	O (mm)	D (mm)	Di (mm)	La (mm)	na	Li (mm)	ni	
1	WB-1-32-1100-1-F	1100	1017	955	955	893	805	1060	30	845	30	131
2	WB-1-32-1200-1-F	1200	1117	1055	1055	993	905	1160	30	945	30	145
3	WB-1-32-1300-1-F	1300	1217	1155	1155	1093	1005	1260	36	1045	36	159
4	WB-1-32-1400-1-F	1400	1317	1255	1255	1193	1105	1360	42	1145	42	172
5	WB-1-32-1500-1-F	1500	1417	1355	1355	1293	1205	1460	42	1245	42	186
6	WB-1-32-1600-1-F	1600	1517	1455	1455	1393	1305	1560	48	1345	48	200

G = 6 Grease nipples DIN 71412 AM 10x1 equally spaced

Line No. = maximum static load raceway. Black line = maximum bolt (8.8)

BONNEKAMP-EU.COM

Authorized distributor



© 2025-09 Product-, image- and data changes reserved.